

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
28 February 2002 (28.02.2002)

PCT

(10) International Publication Number  
**WO 02/16106 A2**

(51) International Patent Classification<sup>7</sup>: **B29C 35/08**,  
B29D 11/00, G02B 1/04, 5/04, G03F 7/09

(21) International Application Number: PCT/US01/25241

(22) International Filing Date: 10 August 2001 (10.08.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/226,697 18 August 2000 (18.08.2000) US  
60/256,176 15 December 2000 (15.12.2000) US

(71) Applicant: **REFLEXITE CORPORATION** [US/US];  
120 Darling Drive, Avon, CT 06001 (US).

(72) Inventor: **MULLEN, Patrick, W.**; 35 Raymond Drive,  
Barkhamsted, CT 06063 (US).

(74) Agents: **CONWAY, Robert, T.** et al.; Hamilton, Brook,  
Smith & Reynolds, P.C., 530 Virginia Road, P.O. Box 9133,  
Concord, MA 01742-9133 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK,  
SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,  
CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD,  
TG).

**Published:**

— *without international search report and to be republished  
upon receipt of that report*

*For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.*

(54) Title: DIFFERENTIALLY CURED MATERIALS AND PROCESS FOR FORMING SAME

(57) Abstract: A structure includes a layer which includes a first cured portion and a second cured portion which are formed from a same light curable material. The first cured portion is cured to a first amount, and the second cured portion is cured to a second amount. The first amount is sufficiently different than the second amount to result in a visible discontinuity on the surface of the structure. A method for forming a pattern in a radiation curable material includes providing between a radiation source and the radiation curable material, a pattern that can block a portion of the radiation from the radiation source. The material is cured with radiation from the radiation source to form a pattern in the radiation curable material.

WO 02/16106 A2

AN2

## DIFFERENTIALLY CURED MATERIALS AND PROCESS FOR FORMING SAME

### BACKGROUND OF THE INVENTION

Many retroreflective sheeting, collimating films, etc. are made to exacting  
5 dimensions in metal molds that are difficult and expensive to make. The metal  
molds can represent a significant barrier of entry into a high quality market for  
sheeting and films. However, knock-off manufacturers of retroreflective sheeting  
and collimating film can form inexpensive, low quality molds from the high quality  
sheeting and film. As a means to deter such copying, the metal molds are often  
10 engraved with a company logo or trademark, which can cause the logo or trademark  
to appear on the knock-off end product. A disadvantage of the added logo is that it  
can be more difficult to engrave at the tolerances required.

Therefore, a need exists for better marked products and a method of marking  
products better.

### 15 SUMMARY OF THE INVENTION

A structure includes a layer which includes a first cured portion and a second  
cured portion which are formed from a same light curable material. The first cured  
portion is cured to a first amount, and the second cured portion is cured to a second  
amount. The first amount is sufficiently different than the second amount to result  
20 in a visible discontinuity on the surface of the structure. The layer can be connected  
to a base. The layer and the base can be formed of the same material. The first  
amount of curing can be sufficiently different than the second amount of curing to  
result a difference in the thickness of the first portion and the thickness of the second  
portion that is in a range of between about 0.05 and 2.0 micrometers. A visible

-2-

discontinuity is considered a rise or depression in the surface of a structure that causes incident light to display a different shade of light that when incident light strikes a portion of the surface not having a rise or depression. The visible discontinuity can be discerned with the naked eye. The layer can be a prism array,  
5 such as linear prisms or cube-corner prisms, a lenticular structure, or a sub-wavelength structure.

A method for forming a pattern in a radiation curable material includes providing between a radiation source and the radiation curable material a blocking pattern that can block a portion of the radiation from the radiation source. The  
10 material is cured with radiation from the radiation source through the blocking pattern to form a pattern in the radiation curable material.

A pattern transfer structure includes a radiation source for emitting radiation, a radiation curable material that can be cured by the radiation and a pattern for blocking a portion of the radiation. The pattern is disposed between the radiation  
15 source and the radiation curable material during the curing of the material such that a pattern is formed in the material.

A method for forming a prism structure includes providing a prism mold and placing a radiation curable material in the mold. A pattern is provided between a radiation source and the radiation curable material that can block a portion of the  
20 radiation curable material. The radiation curable material is cured with radiation from the radiation source to form a pattern in the radiation curable material.

A prism structure includes a base and a prism array connected to the base. The prism array includes a first cured portion and a second cured portion which are formed from a same radiation curable material. The first cured portion has a first  
25 index of refraction value and the second cured portion has a second index of refraction value which is sufficiently different from the first index of refraction value to result in a visible discontinuity on the surface of the structure.

The invention has many advantages including forming a permanent pattern in materials that are transparent and do not significantly detract from other functions.  
30 The material can have the pattern act similar to a watermark in paper to provide a means of identification for a product's source that is difficult to forge. Also the

pattern can serve as a function of light management by altering the path of light that is transmitted through such a structure having the pattern.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows an isometric view of a radiation curable material and a  
5 pattern layer positioned thereover for forming a pattern in the curable material.

Figure 2 shows an isometric view of the radiation curable material having a pattern formed therein.

Figure 3 shows an isometric view of a retroreflective structure having moth-eye structures formed thereon, the moth-eye structures having a pattern formed  
10 therein in accordance with another embodiment of the invention.

Figure 4 shows a perspective view of a standard collimating film.

Figure 5 shows a perspective view of a differentially cured collimating film.

Figure 6 shows a schematic view of a method for forming the differentially cured collimating film.

15 Figure 7 shows a cross-sectional view of another embodiment.

Figure 8 shows a perspective view of the embodiment in Figure 7.

Figure 9 shows an embodiment of a logo pattern.

Figure 10 shows a plot of a surface profile with an interference microscope trace which was made across the surface of a film made with the pattern transfer  
20 process.

The foregoing and other objects, features and advantages of the invention will be apparent from the following more particular description of preferred embodiments of the invention, as illustrated in the accompanying drawings in which like reference characters refer to the same parts throughout the different views. The  
25 drawings are not necessarily to scale, emphasis instead being placed upon illustrating the principles of the invention. All parts and percentages are by weight unless otherwise specified.

## DETAILED DESCRIPTION OF THE INVENTION

A description of preferred embodiments of the invention follows.

Generally, the invention is directed to forming a pattern in a radiation curable material. The pattern, in one embodiment, is transparent when viewed in a direction  
5 substantially normal to the material. However, the pattern can be seen more clearly at a viewing angle of about fifteen degrees from the normal.

Figure 1 illustrates an embodiment of the present invention for forming a pattern, such as exemplary pattern "ABC" provided by, for example, mask or pattern layer 10, disposed between a radiation source 14 and a radiation curable material 12.  
10 In one embodiment, the mask layer 10 can include polycarbonate, polyethylene, polybutylene or the like, and may include a low-tack adhesive. The curable material 12 can include coatings and microstructured or patterned materials formulated from materials, such as polyester, urethane, or epoxy acrylates and methacrylates. Various additives including fillers, free-radical initiators and cationic initiators can be  
15 included in the material 12 to improve processing or performance. See, for example, Sartomer Company Bulletin Nos. 4018 or 4303. The radiation source 14 preferably provides actinic radiation, which causes photochemical activity in the curable material 12. For example, typical ultraviolet light can be used.

The pattern layer 10 can include any kind of material that blocks at least a  
20 portion of the radiation from the radiation source to leave a similar pattern in the cured material 12. For example, the pattern can be formed by a colored pattern, such as, using common printing inks, printed on a transparent polymer film. The pattern can also be formed by embossing patterns that effect the transparency of the film. In one embodiment, the pattern can be applied directly on either side of a substrate  
25 which carries the curable material 12 and after curing, the pattern may or may not be removed to leave the cured pattern in the cured layer 12. In alternative embodiments, the pattern layer 10 can include a stencil or the like, such as a colored or semi-transparent film material or a clear resin with ultraviolet blocking chemical therein.

30 As shown in Figure 2, the pattern layer 10 has been removed but the pattern "ABC" has been transferred to the cured material 12. It is believed that the pattern

-5-

changes the curing rate of the material 12 to form the pattern in the cured material. One theory suggests that the molecules in the formed pattern are denser as the molecules have a longer time to cross-link than the molecules which do not have a mask thereover. These denser regions appear to have different indices of refraction.

5 The pattern is best viewed at an angle of about fifteen degrees.

Figure 3 illustrates another embodiment for forming a pattern in a material. In this embodiment, a pattern layer 10 is positioned over a cured retroreflective structure 16 which can contain, for example, linear or cube-corner prisms.

Examples of suitable cube-corner prisms are disclosed in U.S. Patent 3,684,348,  
10 issued to Rowland on August 15, 1972.

Moth-eye structures 18 can be formed on the opposite side of the retroreflective structure 16 as shown in Figure 3. Moth-eye structures are explained in more detail in U.S. Application No. 09/438,912, filed on November 12, 1999, which corresponds to International Publication No. WO 01/35128, published on  
15 May 17, 2001. The moth-eye structures 18 are cured by the radiation source 14 through the pattern layer 10 such that the pattern is formed in the moth-eye structures 18 or diffusing structure or other suitable structures.

A sub-wavelength structure applied preferably has an amplitude of about 0.4 microns and a period of less than about 0.3 microns. The structure is sinusoidal in  
20 appearance and can provide a deep green to deep blue color when viewed at grazing angles of incidence. Preferably, the amplitude is greater than two times the period to provide a two or greater to one aspect ratio.

To form a sub-wavelength structure, the structure is first produced on a photo resist-covered glass substrate by a holographic exposure using an ultraviolet laser. A  
25 suitable device is available from Holographic Lithography Systems of Bedford, Massachusetts. An example of a method is disclosed in U.S. Patent 4,013,465, issued to Clapham *et al.* on March 22, 1977. This method is sensitive to any changes in the environment, such as temperature and dust, and care must taken. The structure is then transferred to a nickel shim by an electroforming process.

30 In another embodiment, a fine pattern can be formed on the mask layer 10. For example, the pattern can be a few tenths of a millimeter or less in width. A

-6-

curable material, which is preferably substantially clear when cured, is formed on the opposite side of the mask layer 10 of the pattern and cured by a radiation source 14. The fine pattern is thus transferred to the cured material. The mask layer 10 is removed and the cured sheet is placed in front of a display, such as a liquid crystal display. The fine pattern breaks up the pixel pattern in the display without as much light loss as with diffuser sheets.

In radiation cured casting processes where it is desirable to produce features with multiple angles, one normally cuts multiple angle features into the mold that is used for the reproduction of the features. This is commonly true in the manufacture of light guiding or light reflecting products where small angle changes can strongly affect the product performance. The cutting and replication of molds are costly and time consuming processes.

With this invention, one can produce a variety of angle and pattern variations in a product from a single mold design. One prints a "photomask" onto the surface of a carrier sheet or film prior to formation and radiation cure of a mold formed structure. The "photomask" can be clear or colored and be applied to either side of the carrier. If the curing radiation is highly collimated, it is desirable to have the "mask" be semi-transparent to allow for slow curing in that area. In cases where the radiation is less collimated, one can obtain cure through totally opaque masks via scattering and reflections into the masked area.

The resulting product then displays different optical behavior in areas that have been masked due to the variation in shrinkage and refractive index related to the speed of cure which is hindered by the "mask".

Figure 4 shows a perspective view of a typical collimating film 30 with linear prisms 32 having linear peaks 34 and valleys 36. The dihedral angle of the first side 36 and second side 38 of the peak 34 is typically ninety degrees. However, it can be a non-right angle. The linear prisms 32 can be formed on a base film 40.

Figure 5 shows a perspective view of a prism array 52 of a differentially cured collimating film 50. Many of the prisms which are not blocked by a mask, such as prism 54, have a linear peak 56. Many of the prisms, which are blocked, such as prism 58, have a curved peak 60. The curved peak is the result of curing



-7-

through a mask which reduces or increases the cure rate with respect to the surrounding areas. Typically, curved peak 60 is shaped compared to the normal apex of linear peak 56 of prism 58. The region 62 is curved in respect to another region which can result in a wider light distribution. The curved center line 66 of the peak in this prism can be off center in respect to the normal center line 64 depending upon the curing mask used. This region 62 also can have a slightly different index of refraction in respect to other areas. The prisms can be formed on a base film 68, such as a polyester, polycarbonate, polyurethane, acrylic and polyvinyl chloride. Preferably, the mask can cover up to about fifty percent of the area of the product to be formed, such as a collimating film. The shape of the differential cure area can be essentially any configuration or size. This allows one to tailor the light/distribution in specification areas of the sheet, such as to corners or edges, instead of the center of the sheet. Also, if a greater percentage of the area of the structure were blocked as compared to exposed to ultraviolet light, the exposed portion can result in raised portions or bumps. In structures where a lesser percentage of the area of the structure were blocked as compared to exposed to ultraviolet light, the structure can have an appearance with recesses.

In the area which was blocked, the prisms can have nanometer size striations caused by the differential cure shrinkage pattern. These striations can perform like a vertical linear moth-eye structure. Some striations can extend from the peak to valley. The striation can range in width of between about 250 and 770 nanometers depending on the mask pattern. The striations can cause upward light tunneling.

Many other types of prisms can be used including cube-corner prisms. Cube-corner or prismatic retroreflectors are described in U.S. Patent 3,712,706, issued to Stamm on January 23, 1973. Generally, the prisms are made by forming a master negative die on a flat surface of a metal plate or other suitable material. To form the cube-corners, three series of parallel equidistance intersecting V-shaped grooves sixty degrees apart are inscribed in the flat plate. The die is then used to process the desired cube-corner array into a rigid flat plastic surface. Further details concerning the structures and operation of cube-corner micropisms can be found in U.S. Patent 3,684,348, issued to Rowland on August 15, 1972. Also, the pattern transfer



concept can include forming a structured coating onto a smooth surface and also forming a pattern structure onto a micro optical array of any type including submicron to micron size surfaces. Further, a pattern can be placed on plano surfaces, prism surfaces, lens structures, and others. The pattern can be random,  
5 ordered or designed to convey a message.

Referring now to Figure 6, a method for forming the differentially cured collimating film will now be described in further detail. A mold 102 is ruled with linear grooves 104 essentially parallel to the axis about which the mold rotates. The linear grooves can be pitched between about 0.05 and 0.2 mm (0.002 and 0.008  
10 inches). A base film 104 is unrolled from roll 106. The base film 104 can be a suitable material, such as a polyester. Mask film 108 is unrolled from second roll 110. Mask film can be formed of a suitable material, such as polyester, upon which a non-transparent design is printed on the transparent mask film. The non-transparent design can be printed on the mask film in the same manner as a design is  
15 printed on an overhead transparency. The base film 104 and mask film 108 are pinched together by first pinch roller 112 against roller 102. The base film 104 and mask film are kept in close contact with mold 102 until second pinch roller 114. In another embodiment, base film and mask film can be laminated together as a single sheet and then unrolled from a single roll.

20 In yet another embodiment, a removable pattern can be directly printed on a first side of the base film with a suitable light blocking material, such as a water soluble ink or the like. A curable layer of light curable material is placed on the second side of the base film, and the curable layer is differentially cured in the presence of light directed through the pattern and base film to the curable layer.  
25 After differentially curing the layer, the removable pattern is removed from the base film. For example, it can be removed with a solvent, such as water for a water soluble ink. However, other solvents can be used, such as alcohol, hydrocarbons, etc., depending upon the ink or other material used to form the light blocking pattern on the base film. An advantage of this embodiment is that a separate mask film is  
30 not needed.

Prism monomer material 116 is placed at point 118 proximate to pinch roller 112. The monomer material, such as an acrylic, flows into the grooves 120 of mold 102. The prism monomer material 116 is cured differentially by the partially blocked ultraviolet light as it passes ultraviolet lamps 122, 124, to form differentially  
5 cured collimating film 126. Differentially cured collimating film 126 is wound up on wind up roller 128. The mask film 108 is wound up on second wind up roller 130.

In a collimating film having portions that are differentially cured, light is directed through the collimating film that results in different shades of lighting.  
10 Lighter portions include the regions with ninety degree linear prisms. Regions with darker portions include the prisms that were differentially cured by blocking by the mask. In these darker portions, the prisms are slightly distorted due to the different cure rate and appear darker because the light is spread over a broader range.

A light directing film sheeting can be used for collimating light in  
15 backlighting systems. The light directing film sheeting 200, as shown in a cross-sectional side view in Figure 7 and in a perspective view in Figure 8, includes a base film 202 formed of a transparent polyester film, such as ICI Dupont 4000 PET, or polycarbonate, such as Rowland Technologies "Rowtec" film, having a thickness in the range of between about 50 and 250 micrometers (0.002 and 0.01 inches). In a  
20 preferred embodiment, the sheeting can have a thickness in the range of between about 0.1 and 0.15 mm and (0.004 and 0.006 inches) and an index of refraction in the range of between about 1.49 and 1.59.

A series of transparent linear prisms 204 having sides 206 are formed over the base film 202. Sides 206 can be isosceles. The linear prisms 204 extend across  
25 the sheeting. The prisms are formed of a transparent resin, such as a mixture of polymerized CN104 polyacrylate available from Sartomer Chemical Co. and RDX51027 from UCB Chemical. The linear prisms are pitched a distance (p) in a range of between about 25 and 100 micrometers (0.001 and 0.004 inches), preferably about 48 micrometers (0.0019 inches) per prism. The linear prisms have a height (h)  
30 in a range of between about, 20 and 100 micrometers (0.0008 and 0.004 inches) preferably about 25 micrometers (0.001 inches). The linear prisms have pointed

-10-

peaks 206 with a peak angle ( $\alpha$ ) as desired, with preferred values of 88 or 90 degrees in a sheeting. Base angles  $\beta_1$  and  $\beta_2$  can be the same or different. The linear prisms 204 can be attached to the base film 202 by an optional prism adhesive layer 208, such as 7650TC acrylic adhesive available from Bostik Chemical. Prism adhesive  
5 layer 208 has a thickness ( $a_1$ ) in the range of between about 2.5 and 12 micrometers (0.0001 and 0.0005 inches).

On the non-prism side 210 of the base film 202, a pattern structure 212 is formed, such as with a resin composition similar to or the same as the prism side adhesive layer. The pattern structure 212 can be attached to the base film 202 by  
10 pattern adhesive layer 214, which is similar in material and thickness ( $a_2$ ) to prism adhesive layer 208. Pattern structure 212 has a thickness in the range of between about 2.5 and 12 micrometers (0.0001 and 0.0005 inches).

As shown in Figure 9, the pattern structure 230 includes a logo 232, which is an arrangement of four obtuse scalene triangles. The logo can be a company name, a  
15 trademark, a figure, or other desired design. The pattern structure can be printed on sheeting such as a polyester overhead projector sheeting by a laser printer. In the shown embodiment, the logo is repeated in a line on a first axis about every 13 mm. The logos in each line are off-set in the next by a half of a logo and the lines repeat about every 7.5 mm along a second axis in the run/web direction, which is  
20 perpendicular to the first axis. The lines of the logo are about 0.5 mm in width. Other types of designs include cross hatching, geometric figures, numerals, letters, etc.

Returning to Figure 8, the lines are depressions 216 or recesses in the surface of the non-prism side. Depressions 216 can have a depth ( $d$ ) in the range of between  
25 about 0.3 and 2.0 micrometers with an average depth of one micrometer. The depressions are not uniform in slope from edges 218 to low point 220. The depressions can have an average slope of 0.5 degrees to the surface of the base film 102 with the slope being as high as one degree.

The pattern structure is formed by placing a mask film temporarily on one  
30 side of the base film. The mask film has a logo, geometric form (lines, circles, curves, etc.), alphanumerics or any other desired design formed thereon that can

-11-

block a portion of the ultraviolet light as it passes from ultraviolet light source through the mask film to the base film. The portion of the mask film without the logo printed thereon is more transparent to ultraviolet light. On the other side of the base film, an adhesive layer is deposited and an uncured radiation curable resin is placed on the adhesive layer. Ultraviolet light is directed from an ultraviolet light source through the mask layer through the base layer through the adhesive layer to the resin layer. The resin layer is differentially cured because the ultraviolet light intensity is blocked unevenly by the printed patterned to the resin layer resulting in the pattern structure. The pattern structure is uneven and segmented. The portions of the resin layer that have the greatest blockage from the ultraviolet light have the deepest depressions into the surface. The portions that were exposed to ultraviolet light resulted in segments with relatively flat surfaces. The mask film is then removed from the base film. The linear prisms are cast on the same side of the base film where the mask film had been placed. The linear prisms are cured by ultraviolet light directed through the base film. The linear prisms can be slightly differently cured in the portions that are exposed to the ultraviolet light that passes through the pattern structure that is uneven and segmented.

The film can be placed between a light guide and a display, such as a liquid crystal display. The fine pattern breaks-up the pixel pattern in the display without as much light loss as with a diffuser sheet. The pattern structure on the film can be readily visible across the film.

The film can be used as a single sheet or as a two-sheet or more system. A two-sheet system has the linear prisms peaks pointed in the same direction and the length of the peaks on each sheet are often crossed at ninety degrees.

#### Example 1

Linear prisms were cast on polycarbonate and covered with a number 30LC mask film (manufactured by Ivex Packaging Corporation) that had a blue colored "PEEL" pattern printed on it. Moth-eye structures were cast on the opposite side of the prisms and cured by ultraviolet radiation at a web speed of about twelve meters per minute (forty feet per minute) past two 157-236 watts/lineal centimeter (400-600

-12-

Watts/lineal inch) ultraviolet lamps manufactured by Eye Ultraviolet Corporation. After removing the mask film, the cured moth-eye structures retained the "PEEL" pattern which could not be readily seen at a zero degree viewing angle but were pronounced at about a fifteen degree viewing angle.

## 5 Example 2

Alphanumeric images were handwritten onto the surface of a mask film on a cling mask sample of polycarbonate film manufactured by Rowland Technologies Incorporated. Commonly available felt tip marker pens were used to form the images. An ultraviolet curable coating of epoxy acrylate was applied to the other  
10 side of the polycarbonate film and cured under a 236 Watts per lineal centimeter (600 Watts per lineal) inch lamp at about 4.6 meters per minute (fifteen feet per minute). The mask film was removed and the cured coating was visually examined at various angles. The images that had been on the mask film were visible at shallow viewing angles in the cured coating.

## 15 Example 3

Figure 10 shows a plot of a surface profile with an interference microscope trace which was made across the surface of a film made with the pattern transfer process.

The height of the features is slightly less than one wavelength of red light.  
20 Red light wavelength is 632.8 nm ( $2.49 \times 10^{-5}$  inches). The height of the features is approximately 500 to 900 nm ( $1.9685 \times 10^{-5}$  to  $3.5433 \times 10^{-5}$  inches). The average height is about 640 nm ( $2.5197 \times 10^{-5}$  inches).

The height and slope of the features caused some light deviation as the light passes through the film. However, the effect on brightness appears to be positive by  
25 about a one percent gain. Additionally, these features can act as resting points for the prism peaks of collimating films as the films are stacked upon each other and therefore prevent the majority of the prism peaks from being damaged by abrasion.

-13-

## CLAIMS

What is claimed is:

1. A structure comprising:  
a layer which includes a first cured portion and a second cured  
5 portion which are formed from a same light curable material, said first cured  
portion is cured to a first amount and said second cured portion is cured to a  
second amount, said first amount is sufficiently different than the second  
amount to result in a visible discontinuity on the surface of the structure.
2. The structure of Claim 1 wherein said layer is connected to a base.
- 10 3. The structure of Claim 2 wherein said layer and said base are formed of the  
same material.
4. The structure of Claim 1 wherein said first amount is sufficiently different  
than the second amount to result a difference in the thickness of the first  
portion and the thickness of the second portion that is in a range of between  
15 about 0.05 and 2.0 micrometers.
5. The structure of Claim 1 wherein said light curable material is selected from  
a group consisting of polyesters, urethanes, epoxy acrylates and  
methacrylates.
6. The structure of Claim 1 wherein the base is formed from a material selected  
20 from the group consisting of polyester, polycarbonate, polyurethane, acrylic  
and polyvinyl chloride.
7. The structure of Claim 1 wherein said layer includes linear prisms.

-14-

8. The structure of Claim 1 wherein said layer includes a lenticular structure.
9. The structure of Claim 1 wherein said layer includes a cube-corner prism.
10. The structure of Claim 1 wherein said layer includes a sub-wavelength structure.
- 5 11. The structure of Claim 1 wherein said first cured portion is configured to represent a logo, geometric forms or alphanumerics.
12. The structure of Claim 1 wherein said first cured portion has an index of refraction that is different than the index of refraction of the second cured portion.
- 10 13. The structure of Claim 1 wherein said first cured portion has a density that is different than the density of the second cured portion.
14. The structure of Claim 1 wherein said base and said layer include the same light curable material.
15. A method for forming a pattern in a radiation curable material, comprising:
  - 15 a) providing between a radiation source and the radiation curable material, a blocking pattern that can block a portion of the radiation from the radiation source; and
  - b) curing the material with radiation from the radiation source through the blocking pattern to form a pattern in the radiation curable material.
- 20 16. The method of Claim 15 wherein the radiation source emits ultraviolet light.



-15-

17. The method of Claim 12 wherein the radiation curable material is selected from polyesters, urethanes, epoxy acrylate and methacrylates.
18. The method of Claim 15 wherein the pattern is configured in the form of a logo, geometric form, or alphanumerics.
- 5 19. The method of Claim 15 wherein the blocking pattern is formed on a separate film.
20. The method of Claim 15 wherein the radiation curable material is connected to a base film.
21. The method of Claim 20 wherein the blocking pattern is removably placed  
10 on the base film.
22. A structure formed by the method of Claim 15.
23. A pattern transfer structure, comprising:
  - a) a radiation source for emitting radiation;
  - b) a radiation curable material that can be cured by the radiation; and
  - 15 c) a pattern for blocking a portion of the radiation, said pattern disposed between the radiation source and the radiation curable material during the curing of the material such that a pattern is formed in the material.
24. The pattern transfer structure of Claim 23 wherein said radiation source can emit ultraviolet light.
- 20 25. The pattern transfer structure of Claim 23 wherein said radiation curable material is selected from a material consisting of polyester, epoxy acrylates, urethanes and methacrylates.

-16-

26. The pattern transfer structure of Claim 23 wherein the pattern is configured in the form of a logo, geometric forms and alphanumerics.
27. A method for forming a prism structure comprising:
- a) providing a prism mold;
  - 5 b) placing a radiation curable material in the mold;
  - c) providing between a radiation source and the radiation curable material, a pattern that can block a portion of the radiation curable material; and
  - d) 10 curing the radiation curable material with radiation from the radiation source to form a pattern in the radiation curable material.
28. The structure of Claim 27 wherein said first cured portion has an index of refraction that is different than the index of refraction of the second cured portion.
29. 15 The structure of Claim 27 wherein said first cured portion has a density that is different than the density of the second cured portion.
30. A prism structure comprising:
- a) a base;
  - b) 20 a prism array connected to said base, said prism array includes a first cured portion and a second cured portion which are formed from a same radiation curable material, said first cured portion has a first index of refraction value and said second cured portion has a second index of refraction value which is sufficiently different from said first index of refraction value to result in a visible discontinuity on the surface of the structure.

1/8

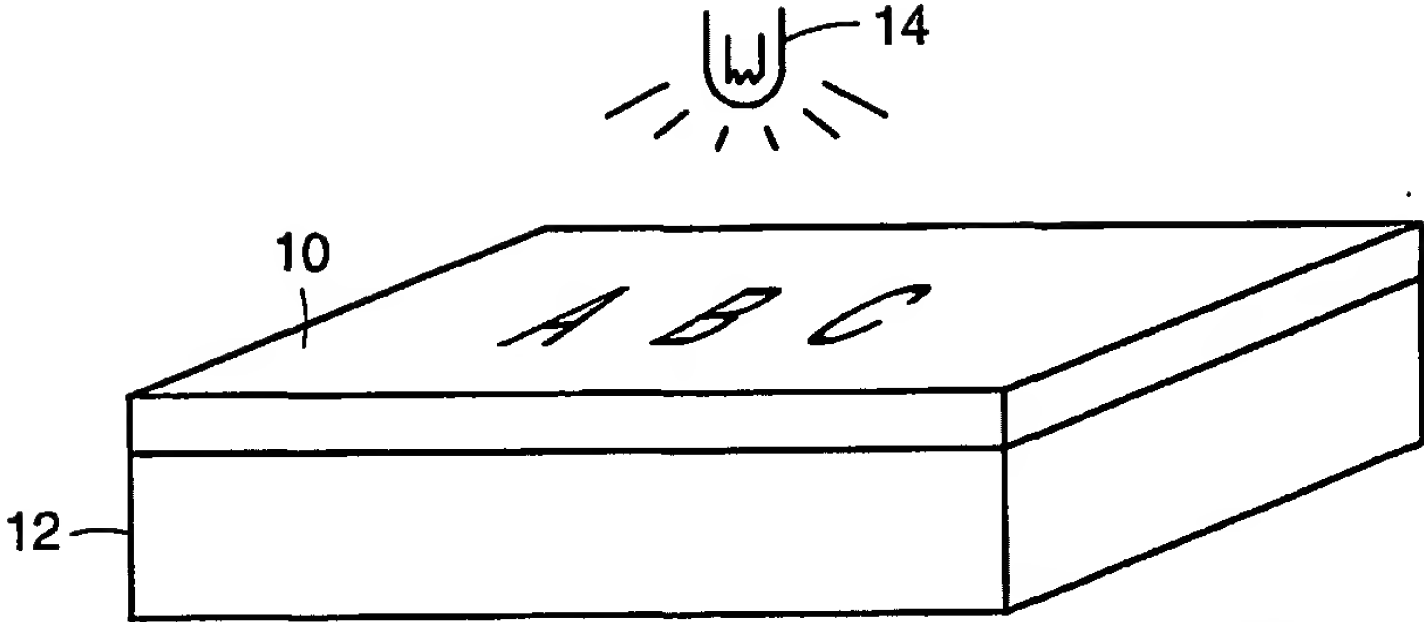


FIG. 1

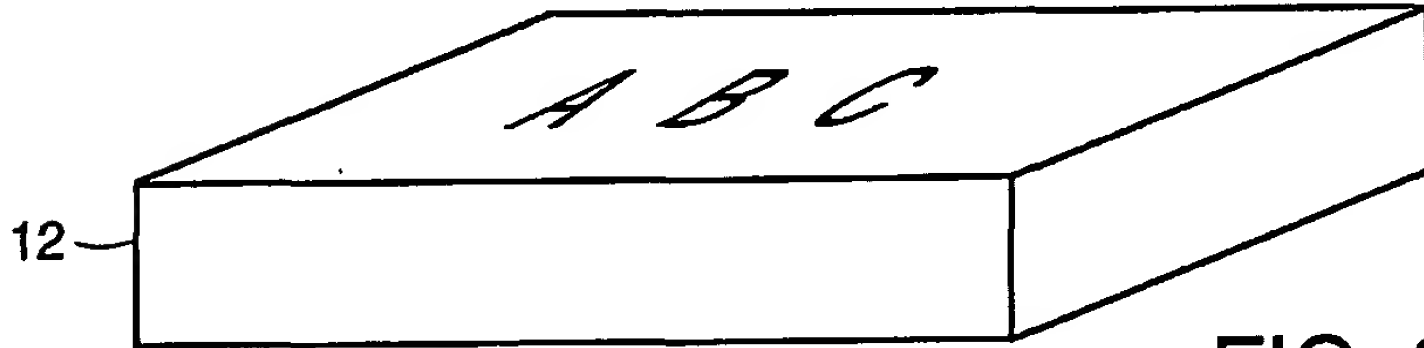


FIG. 2

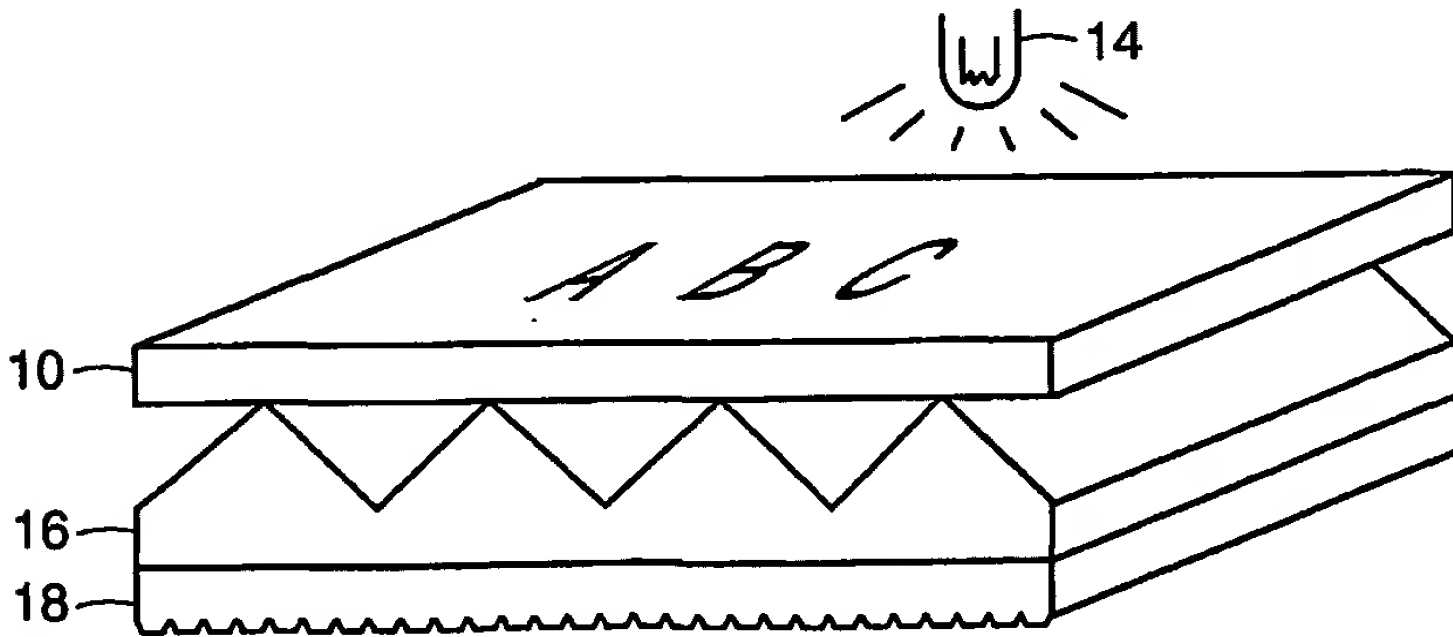


FIG. 3

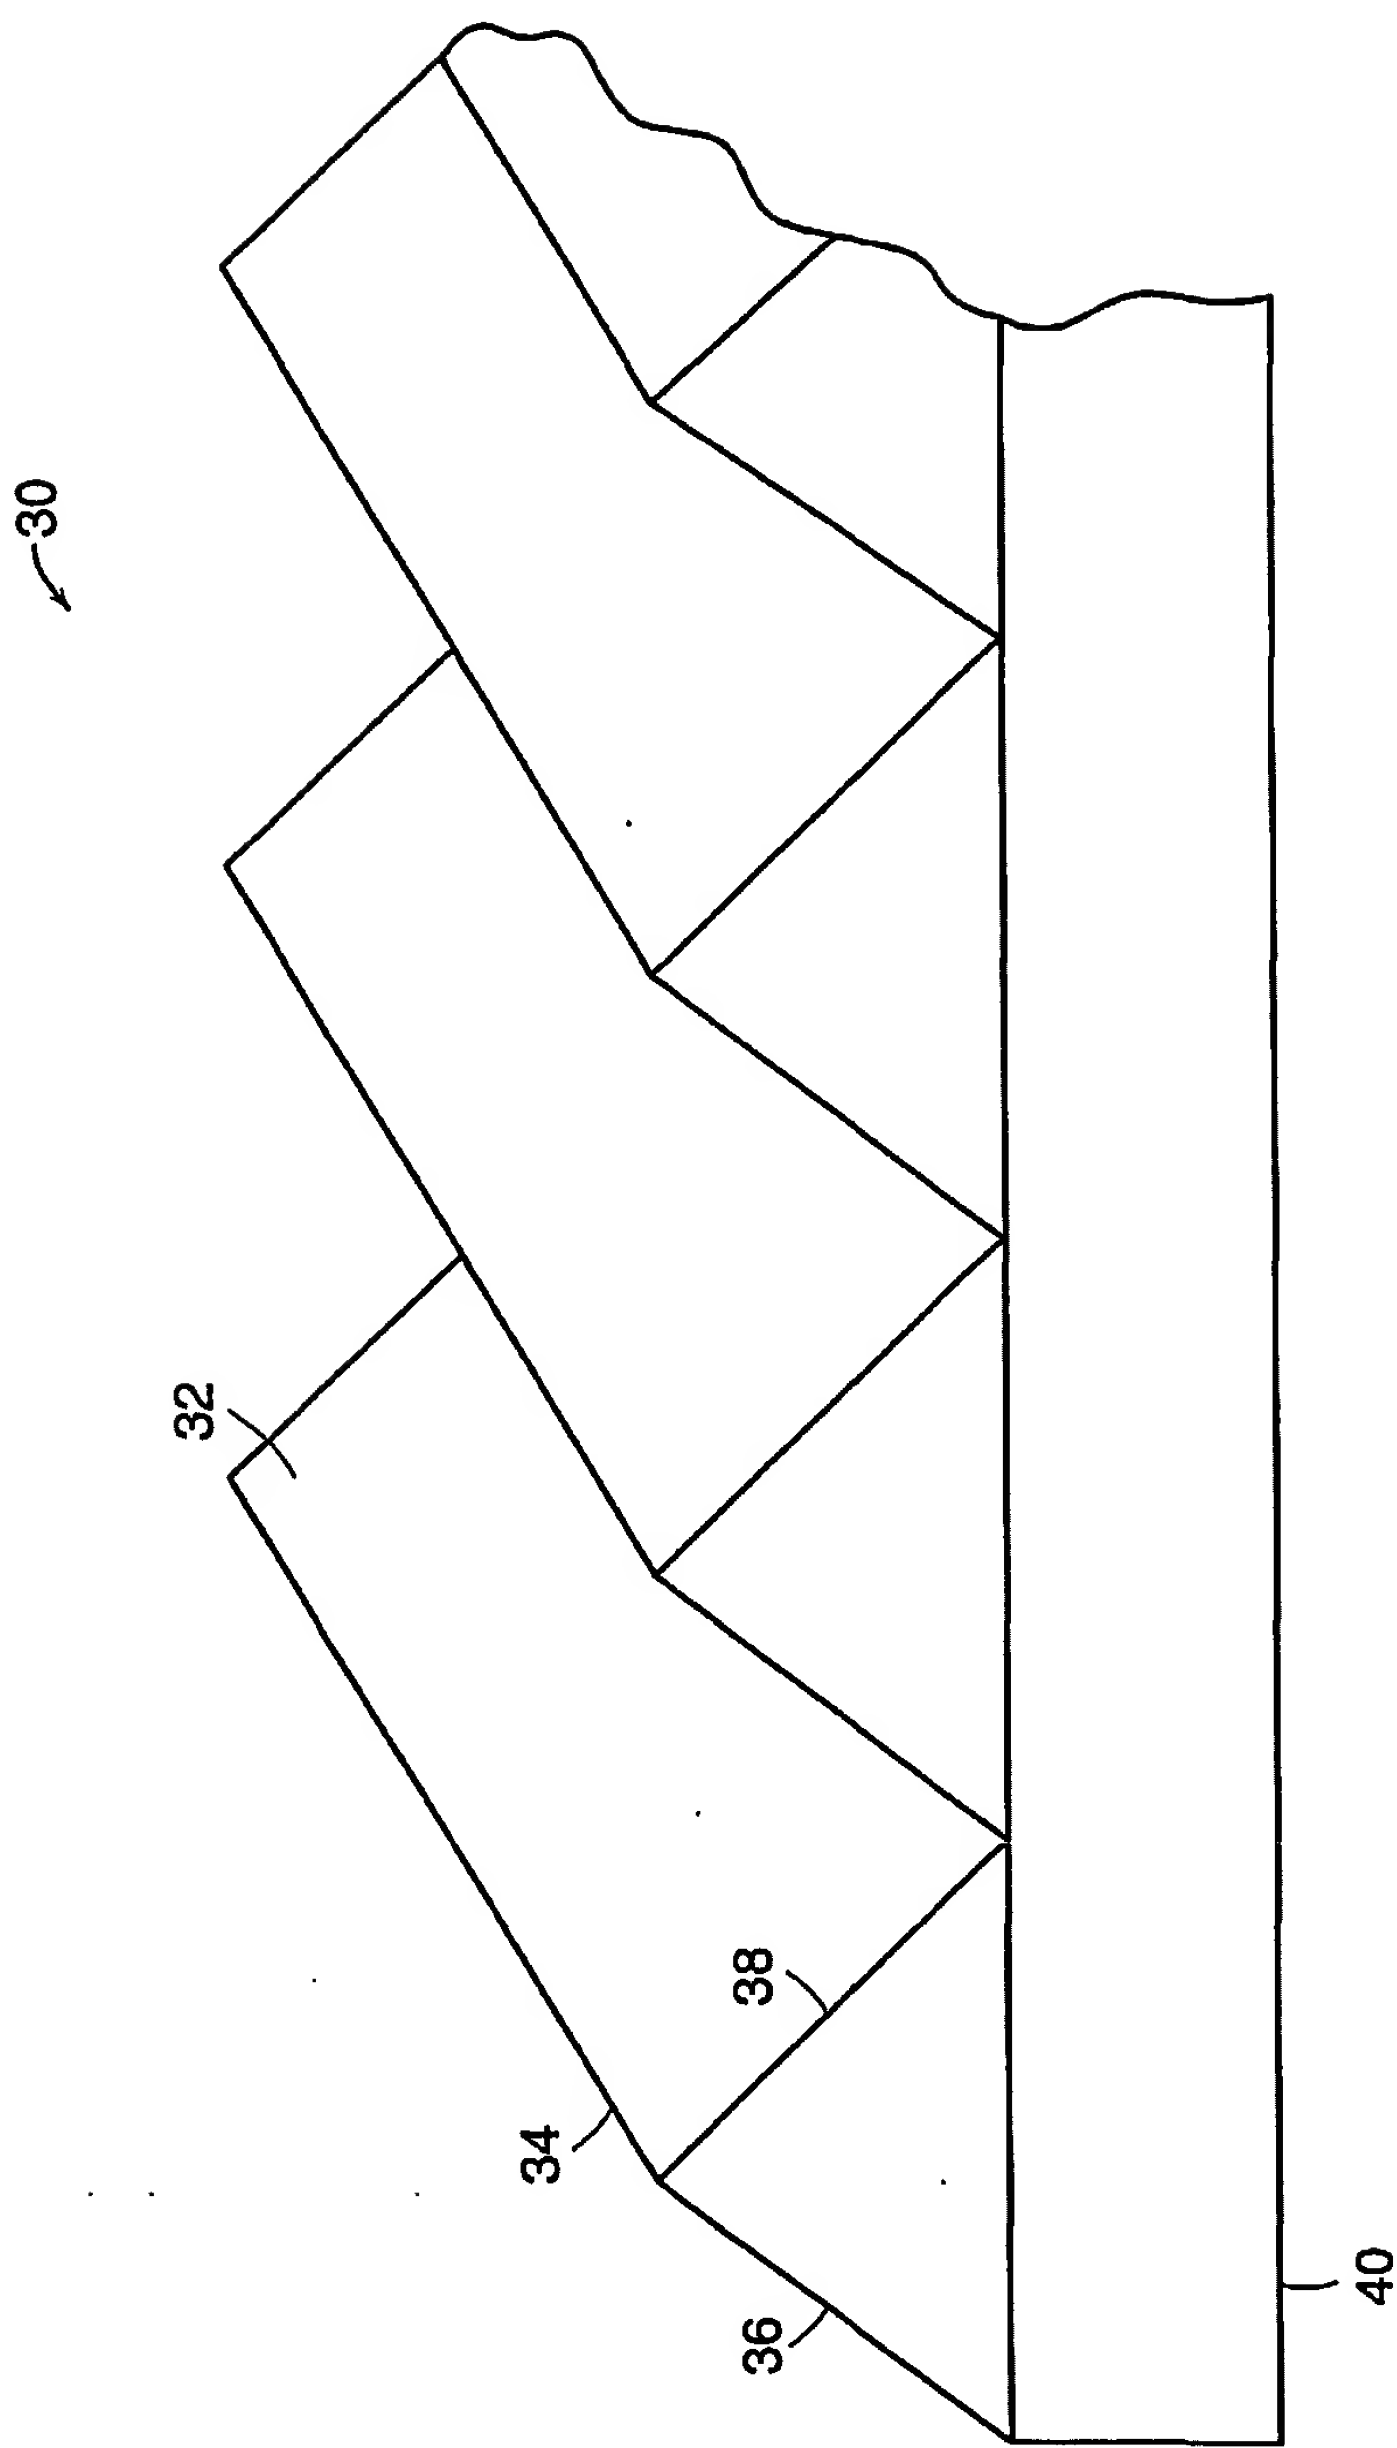


FIG. 4

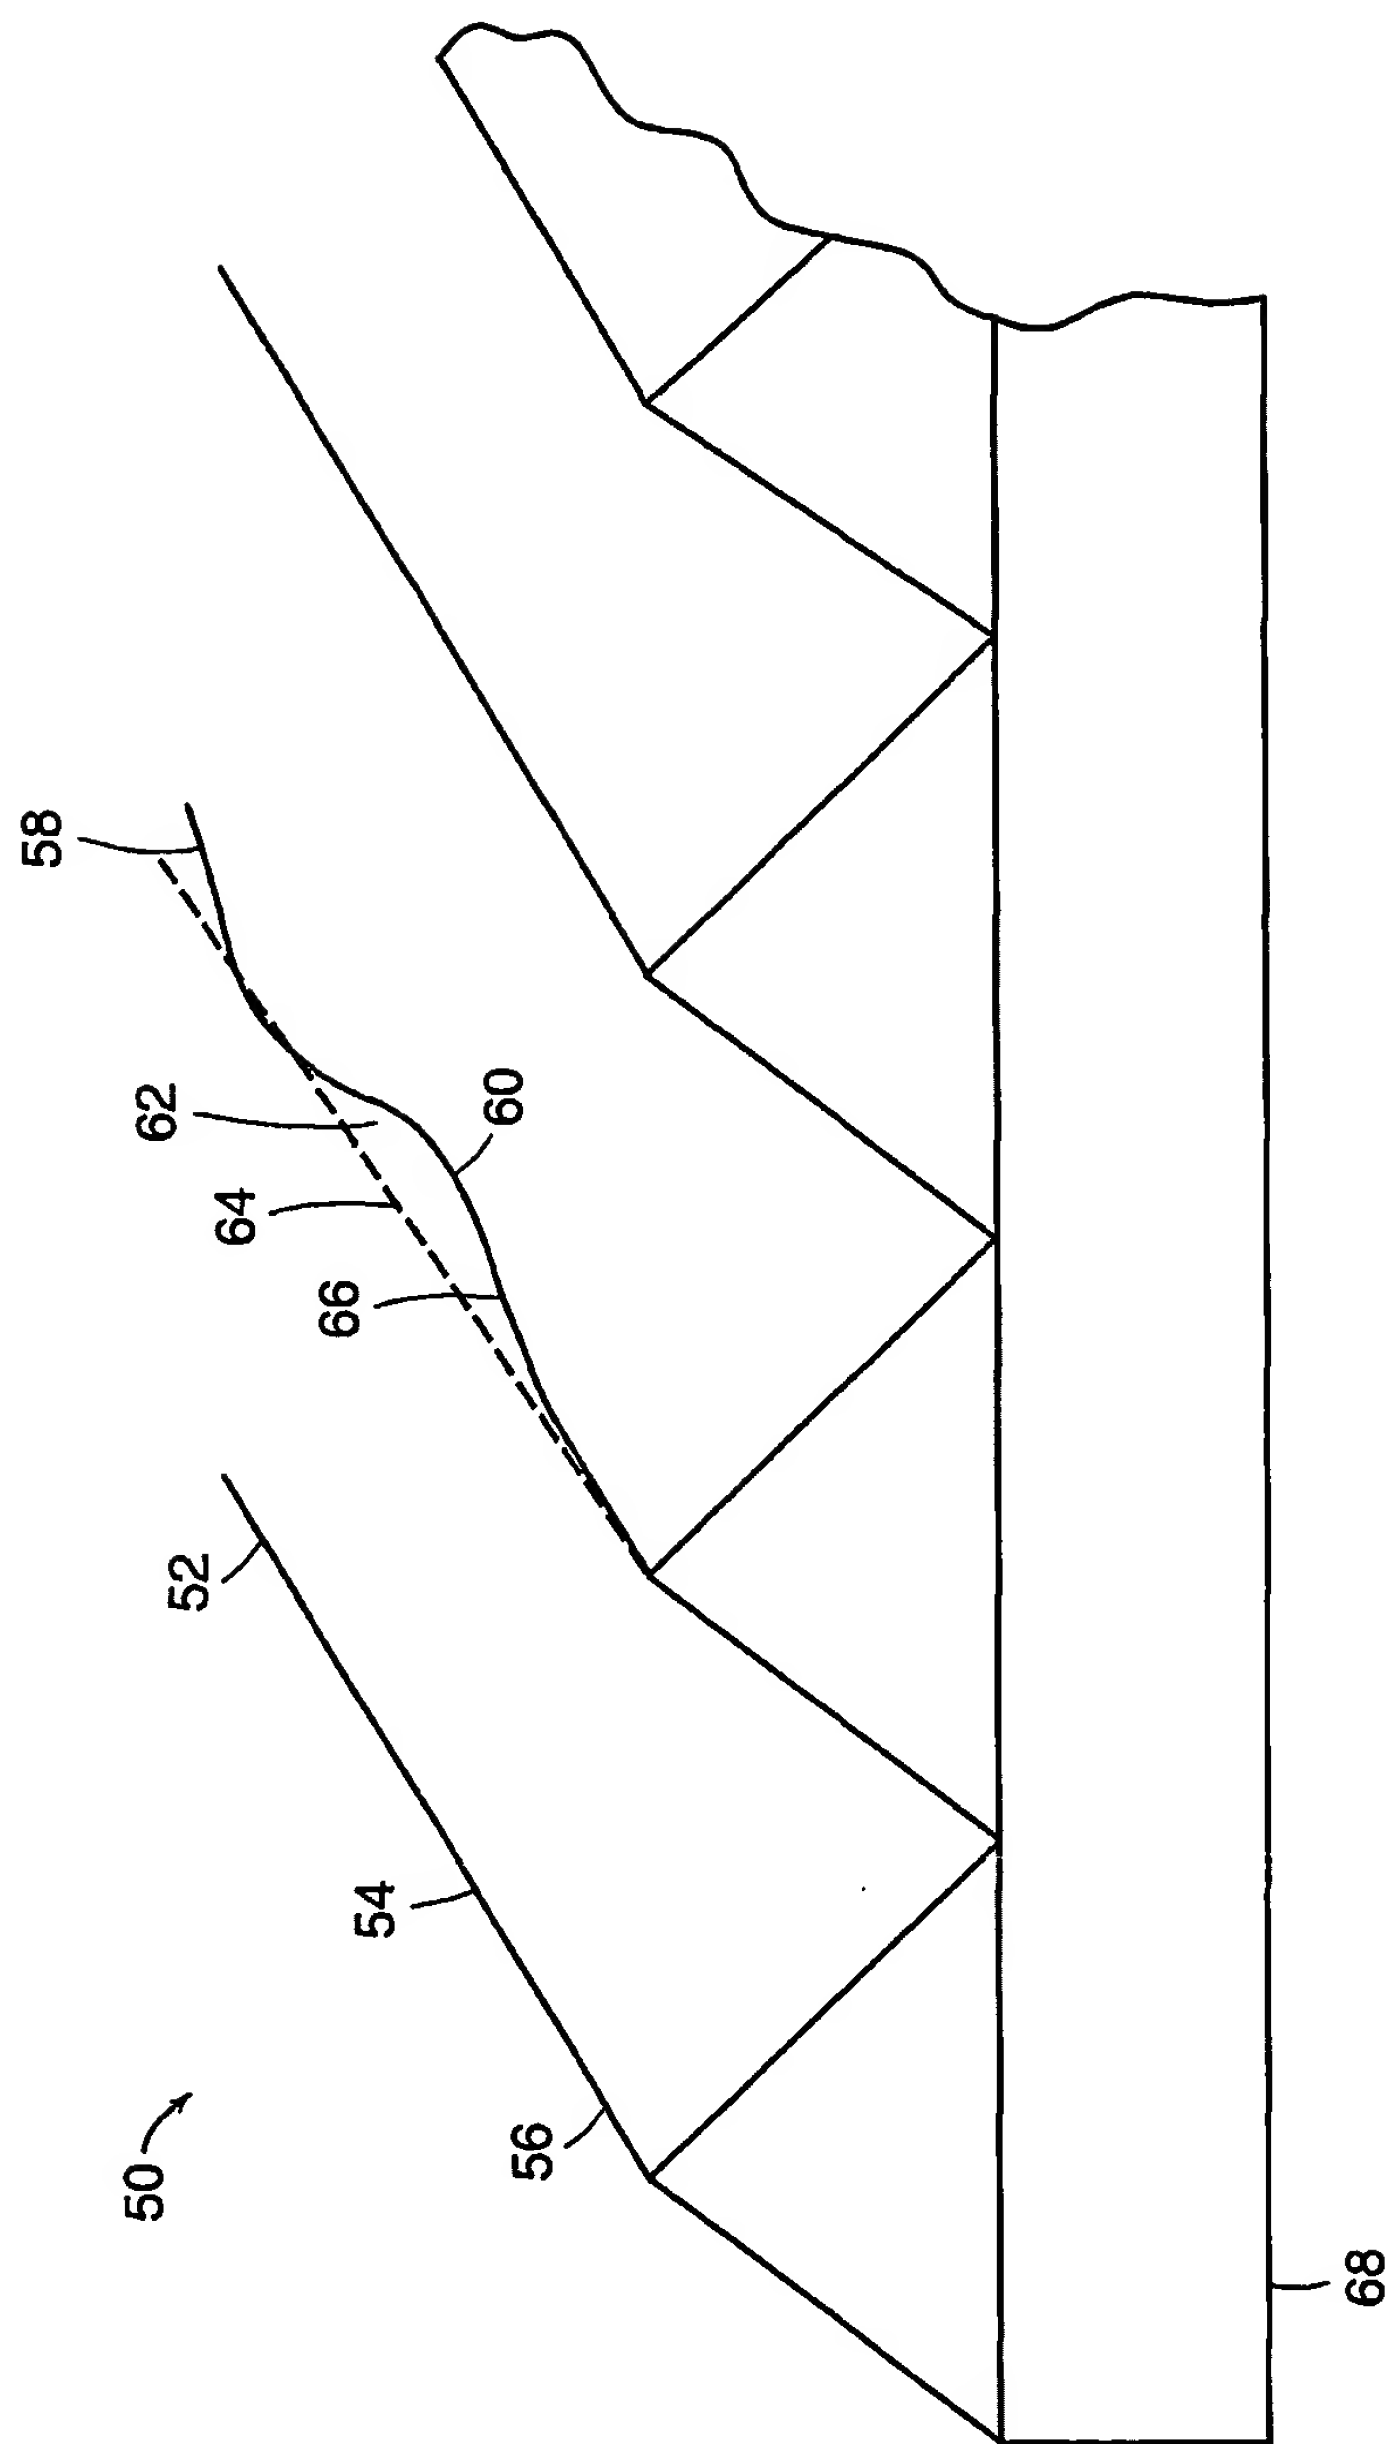


FIG. 5

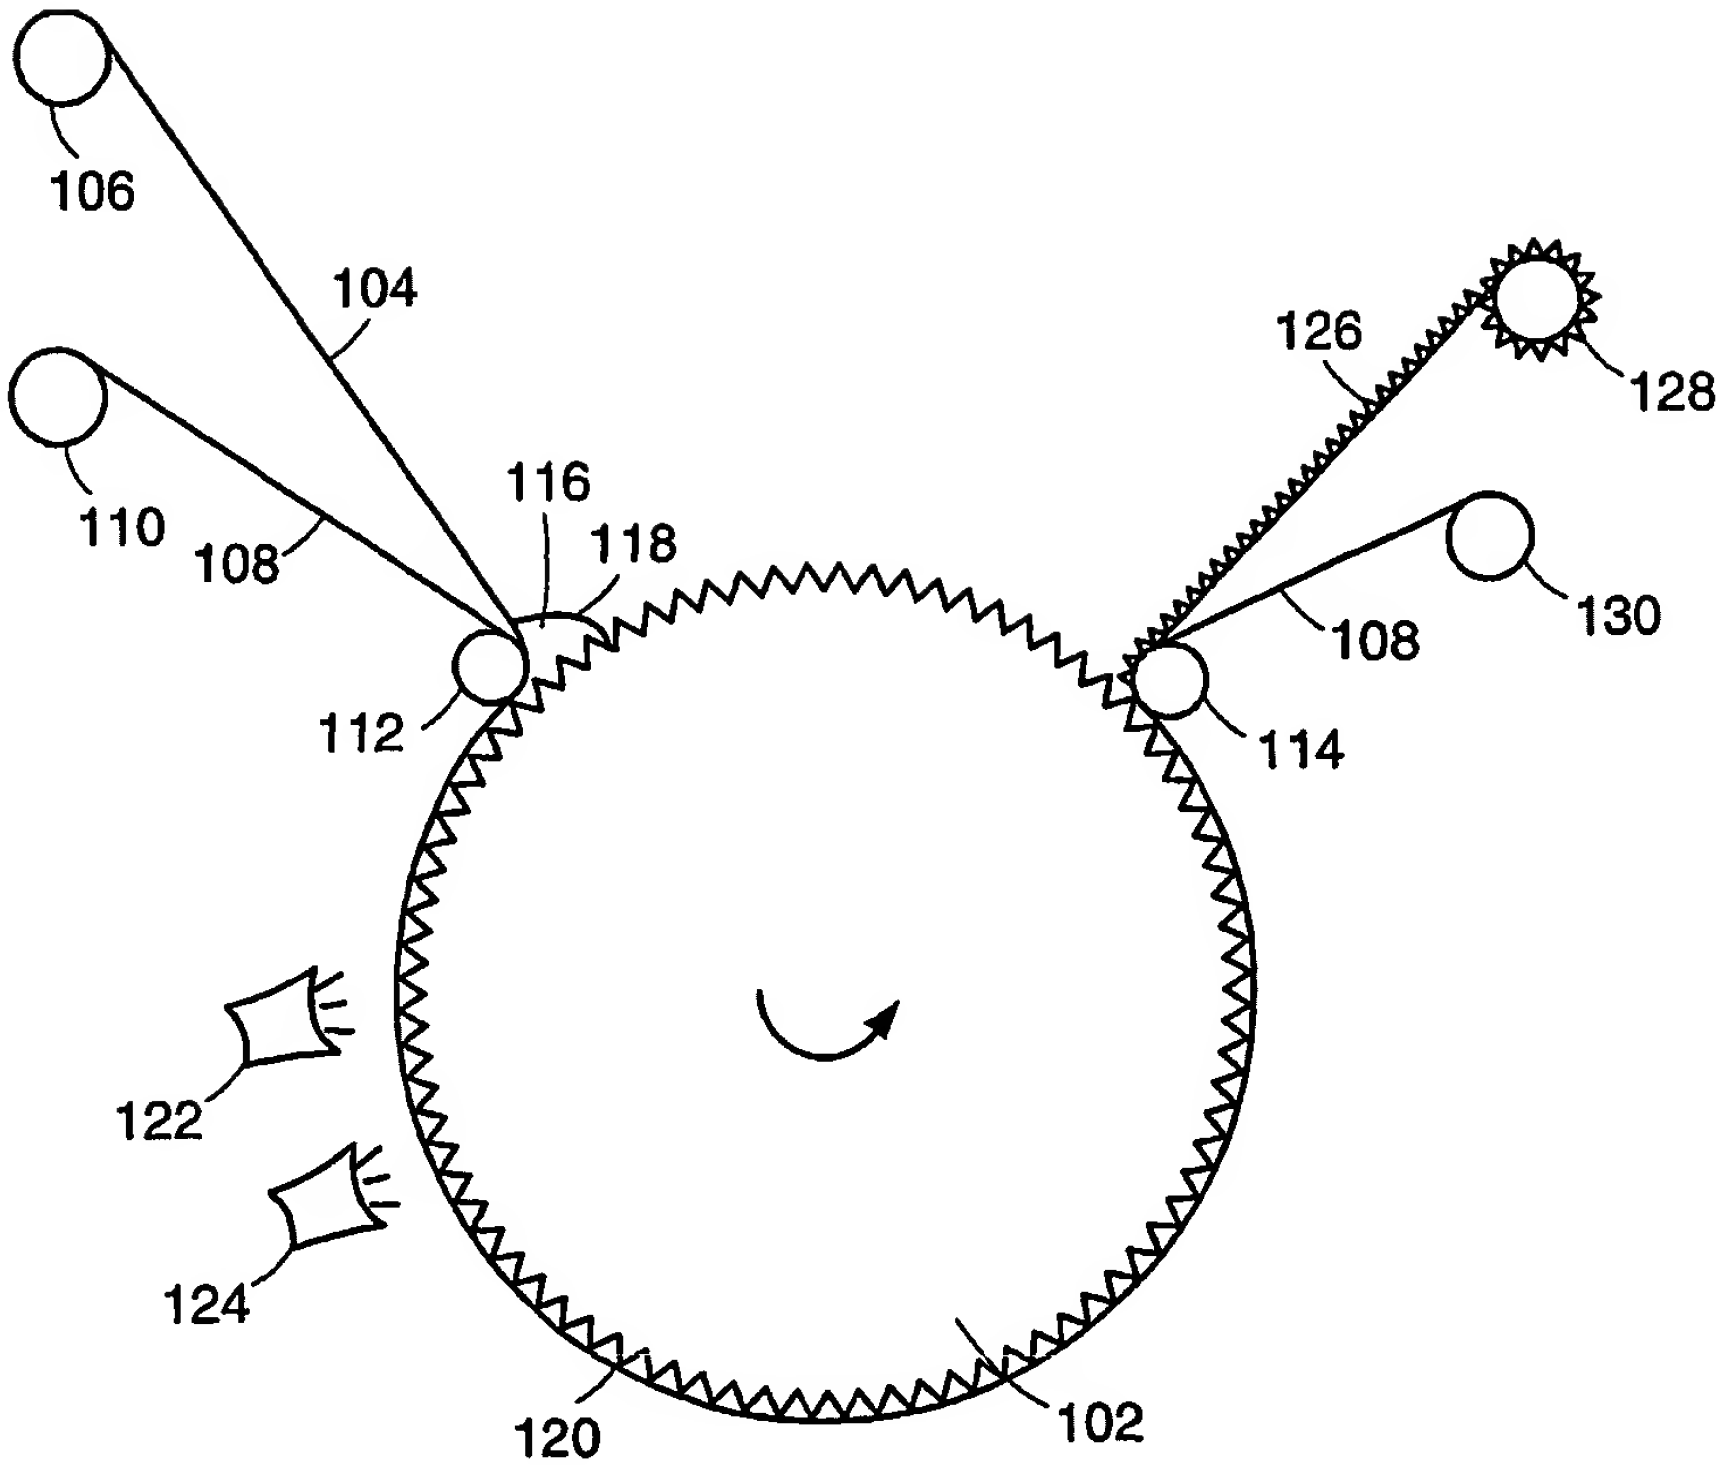


FIG. 6

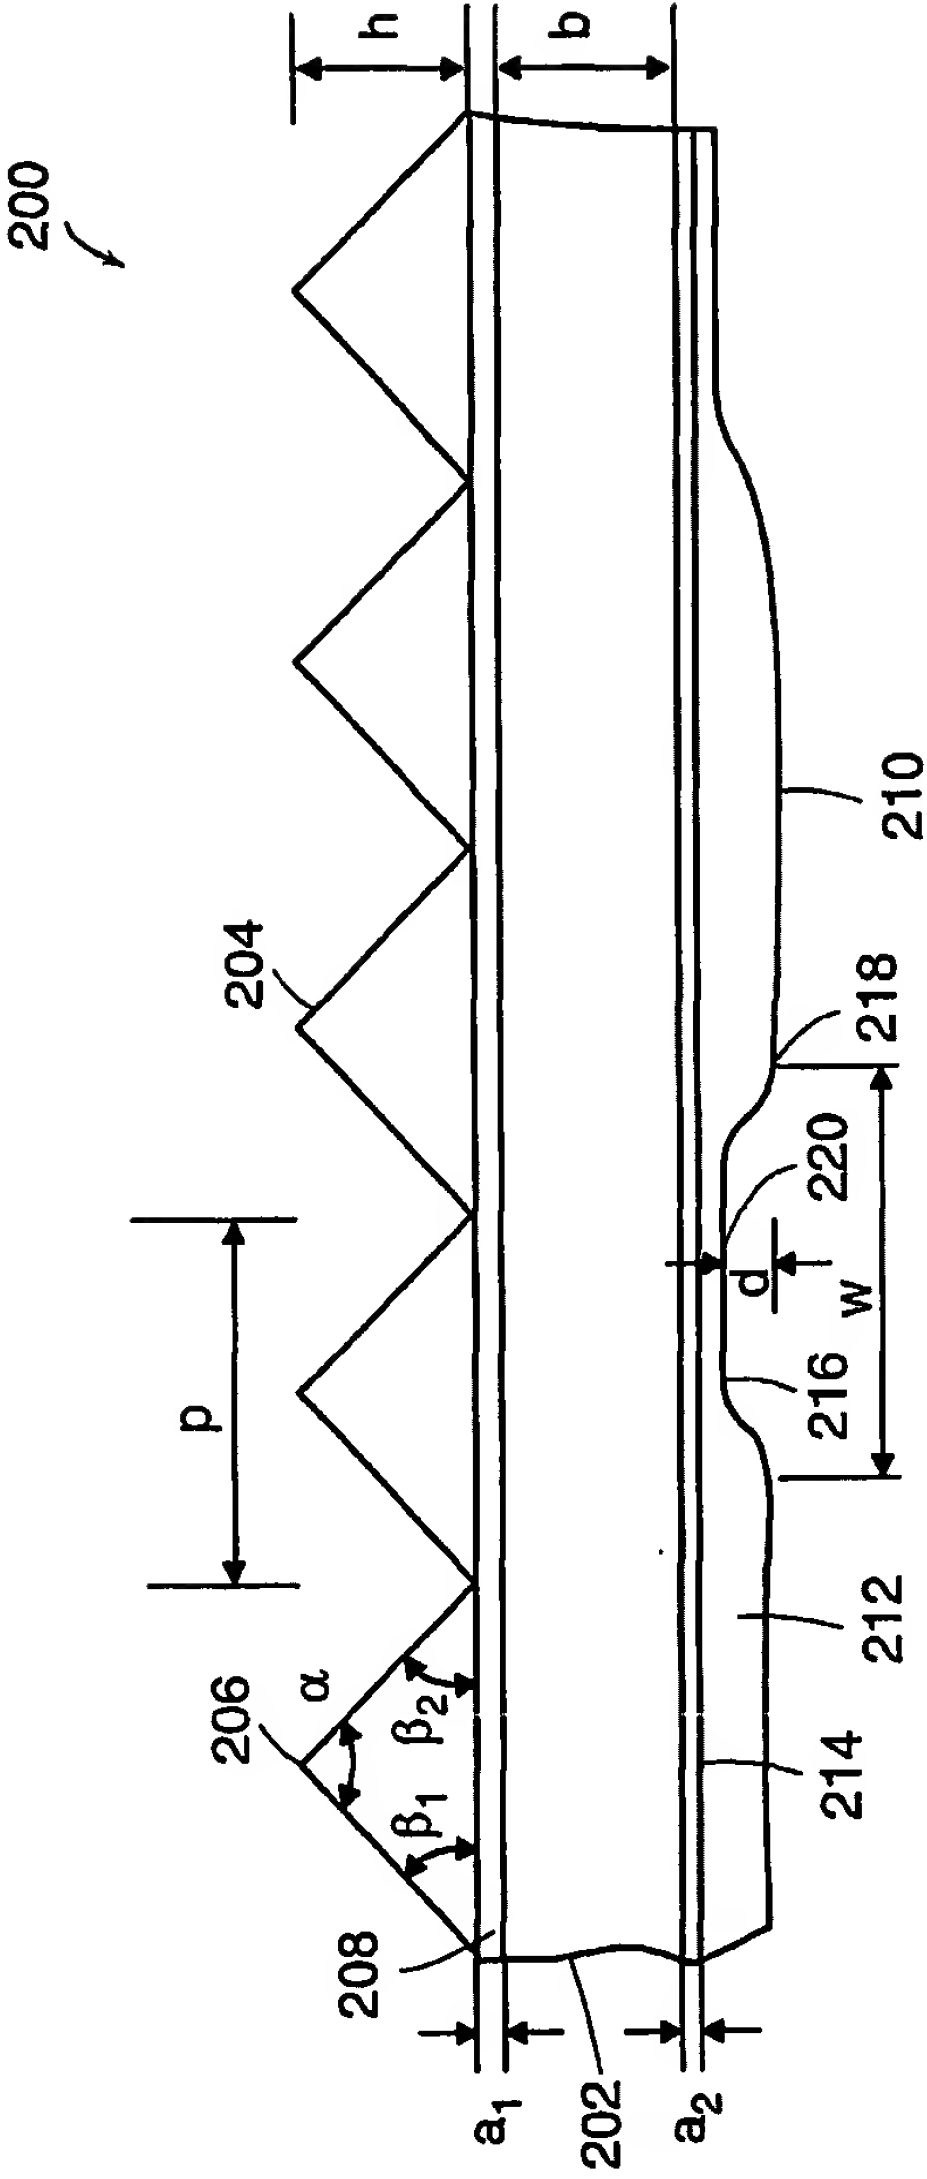


FIG. 7



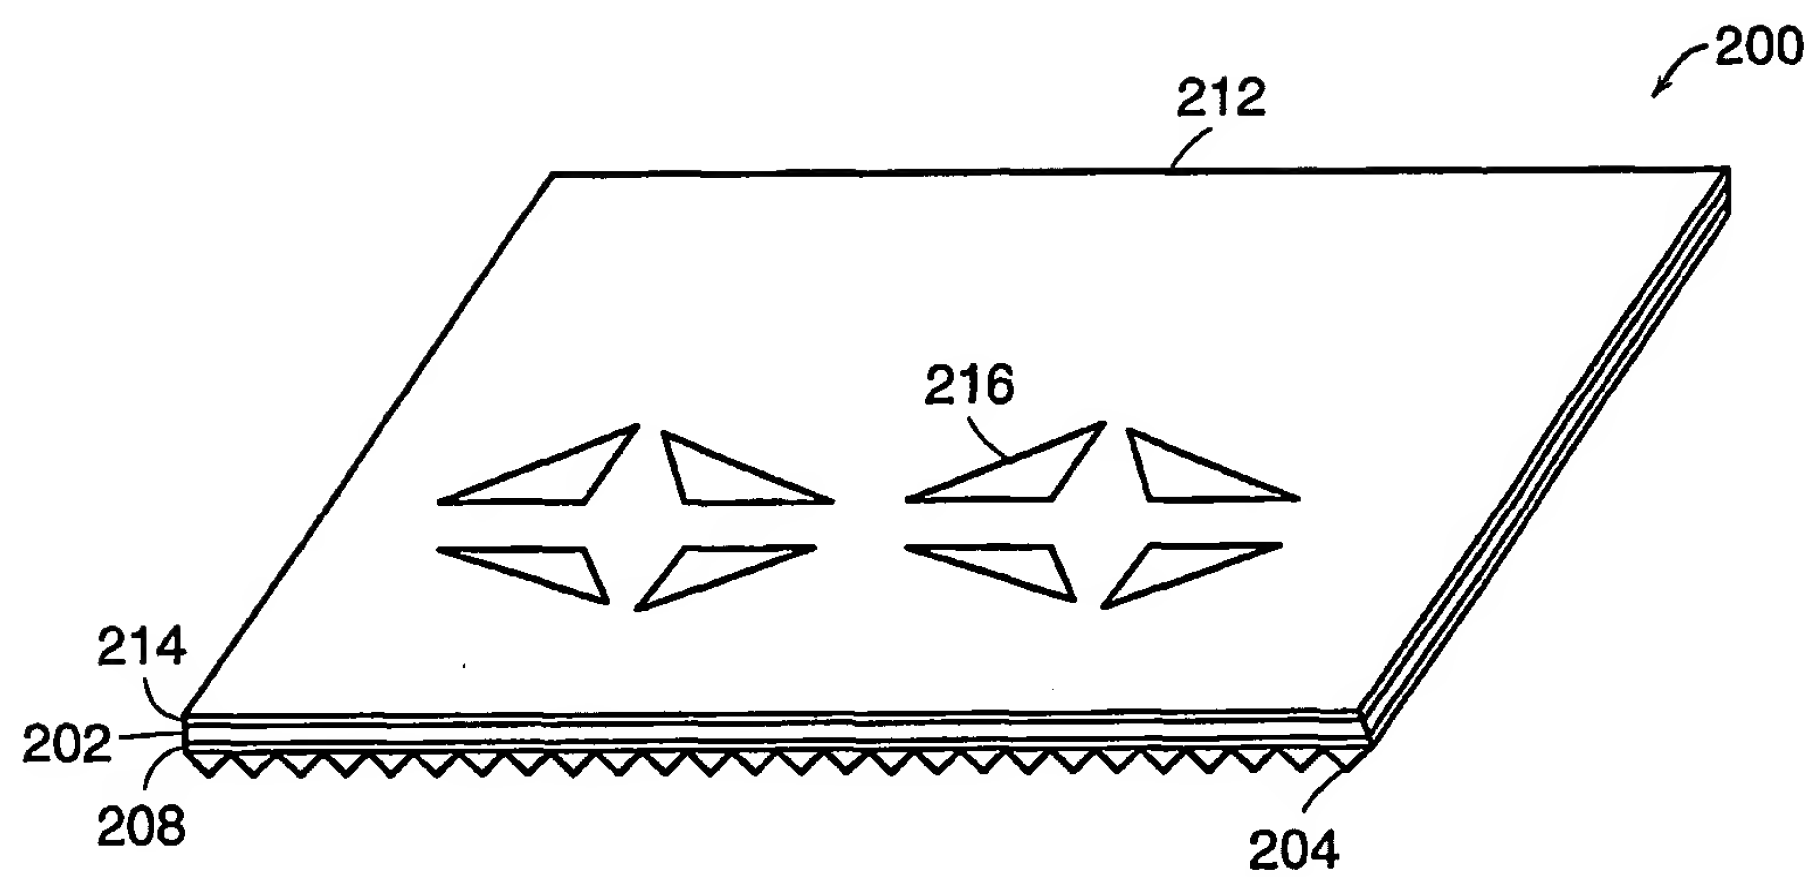


FIG. 8

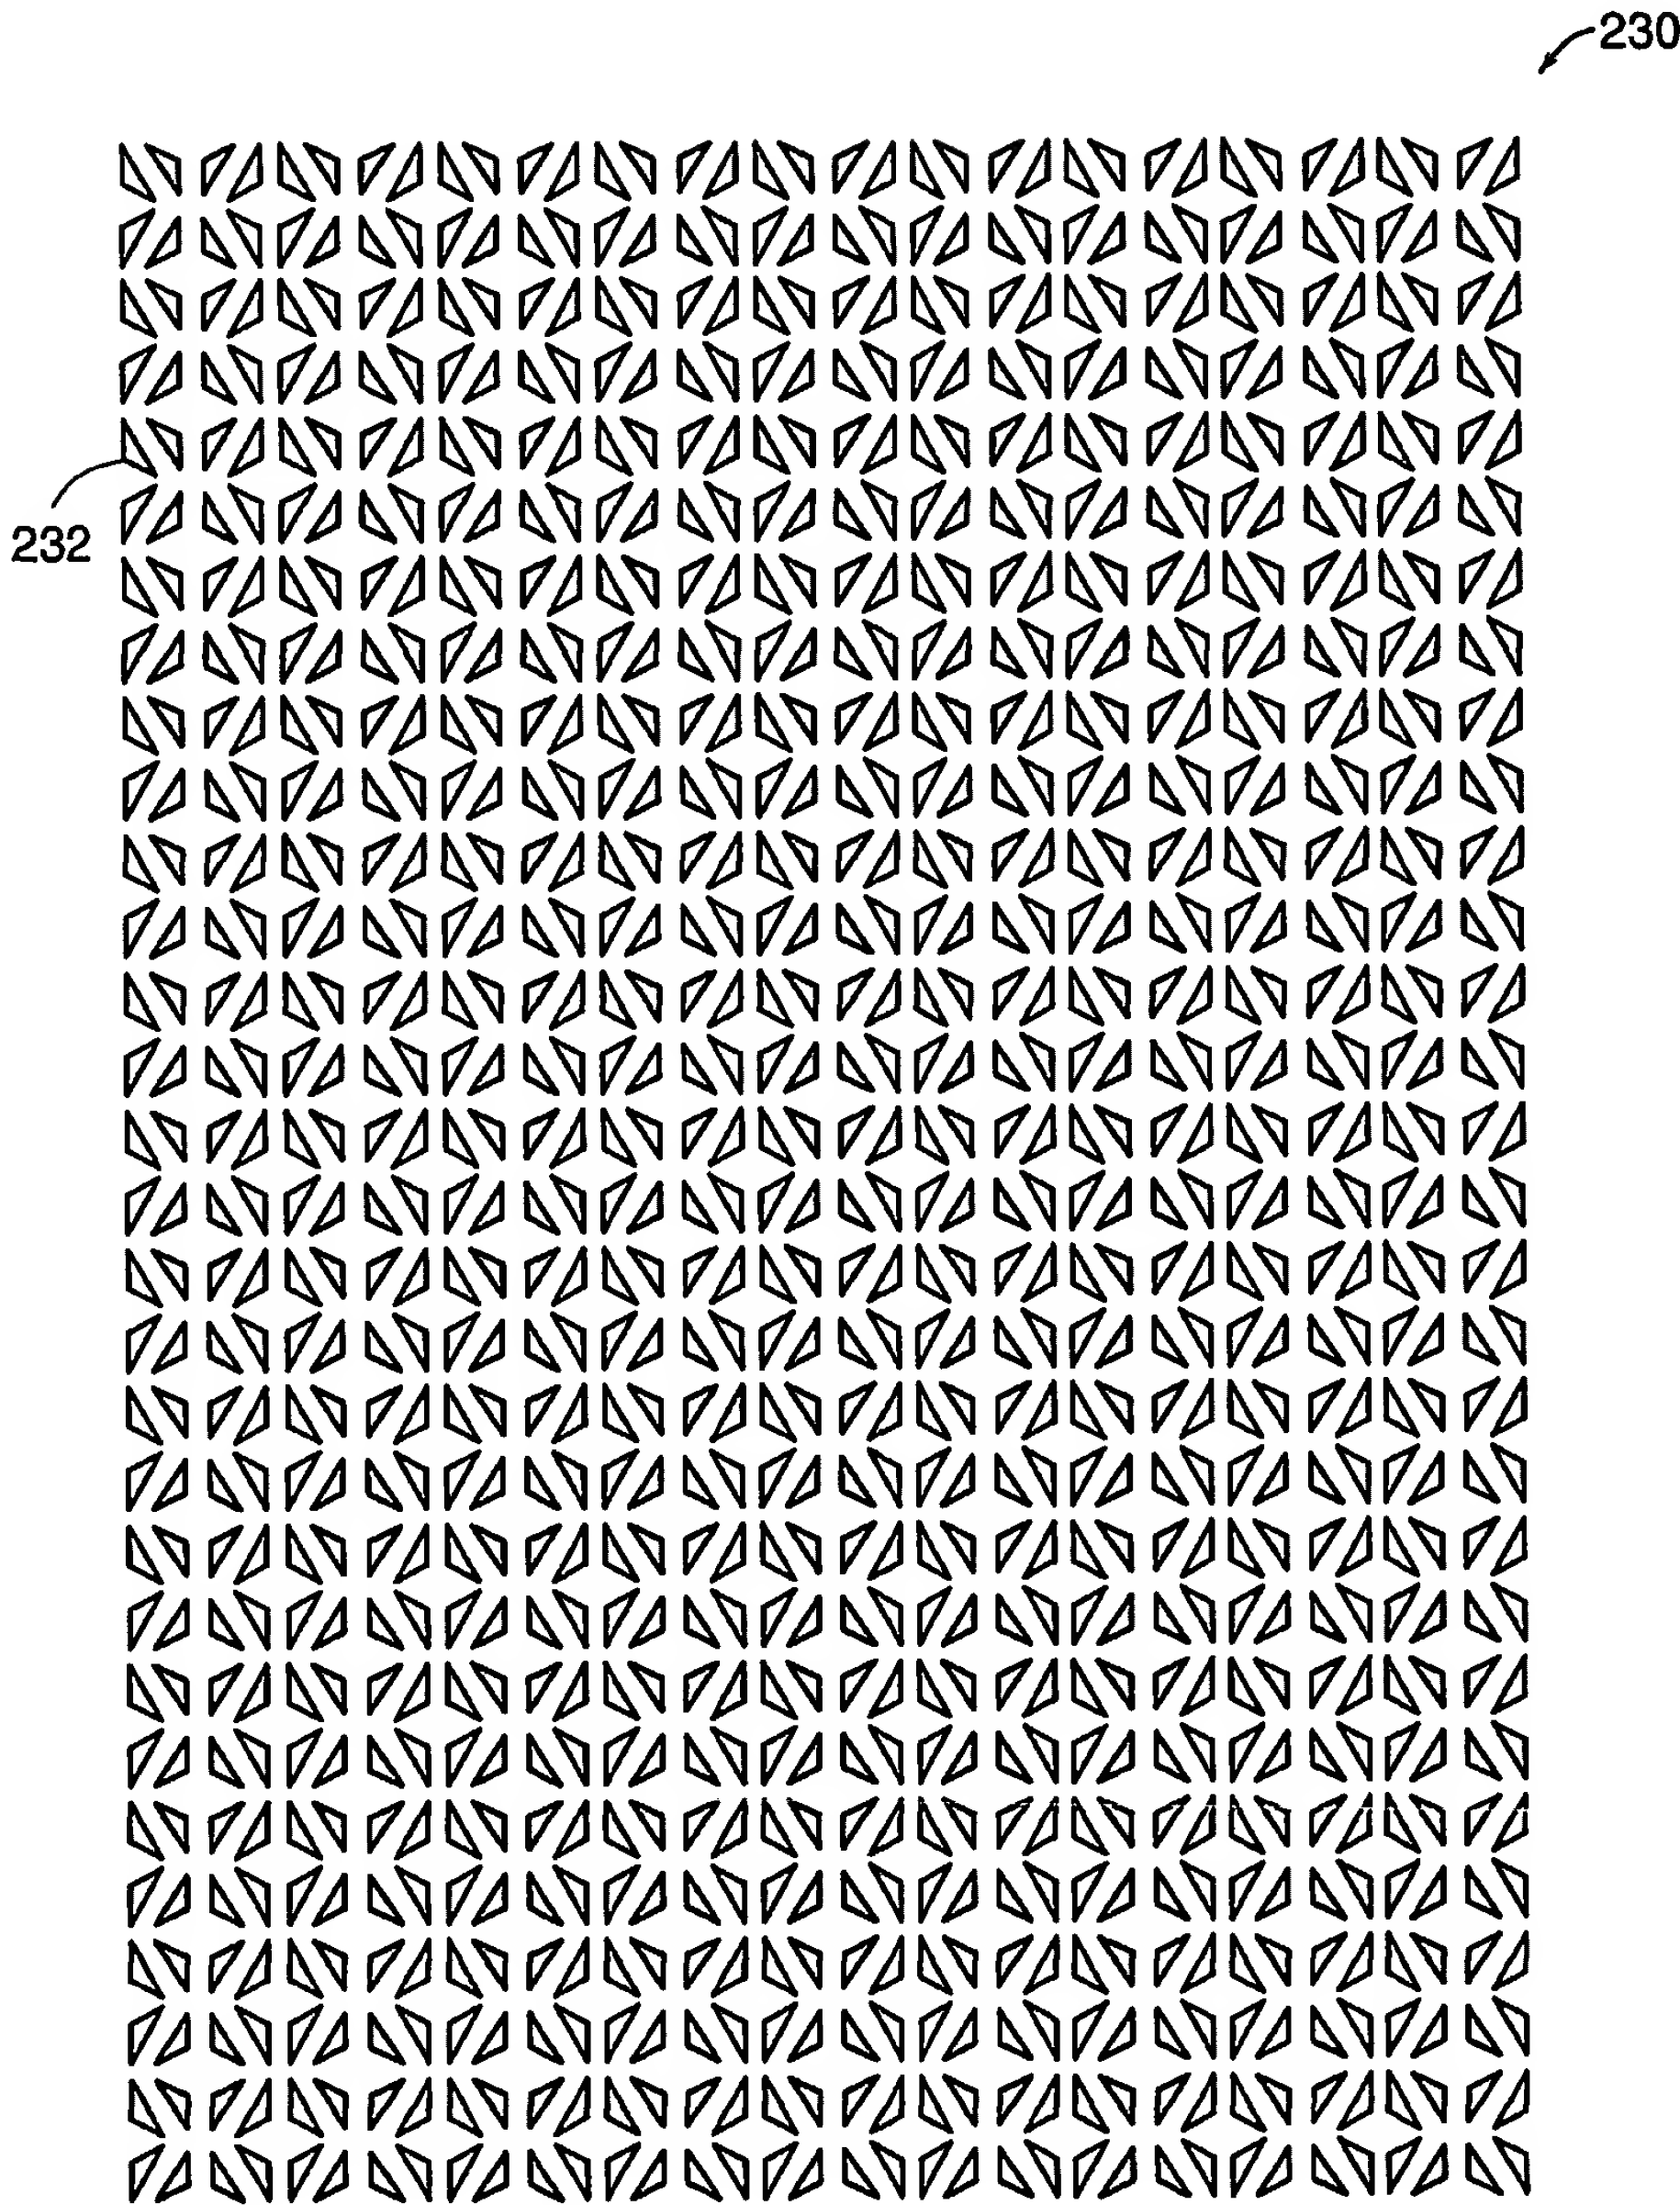


FIG. 9

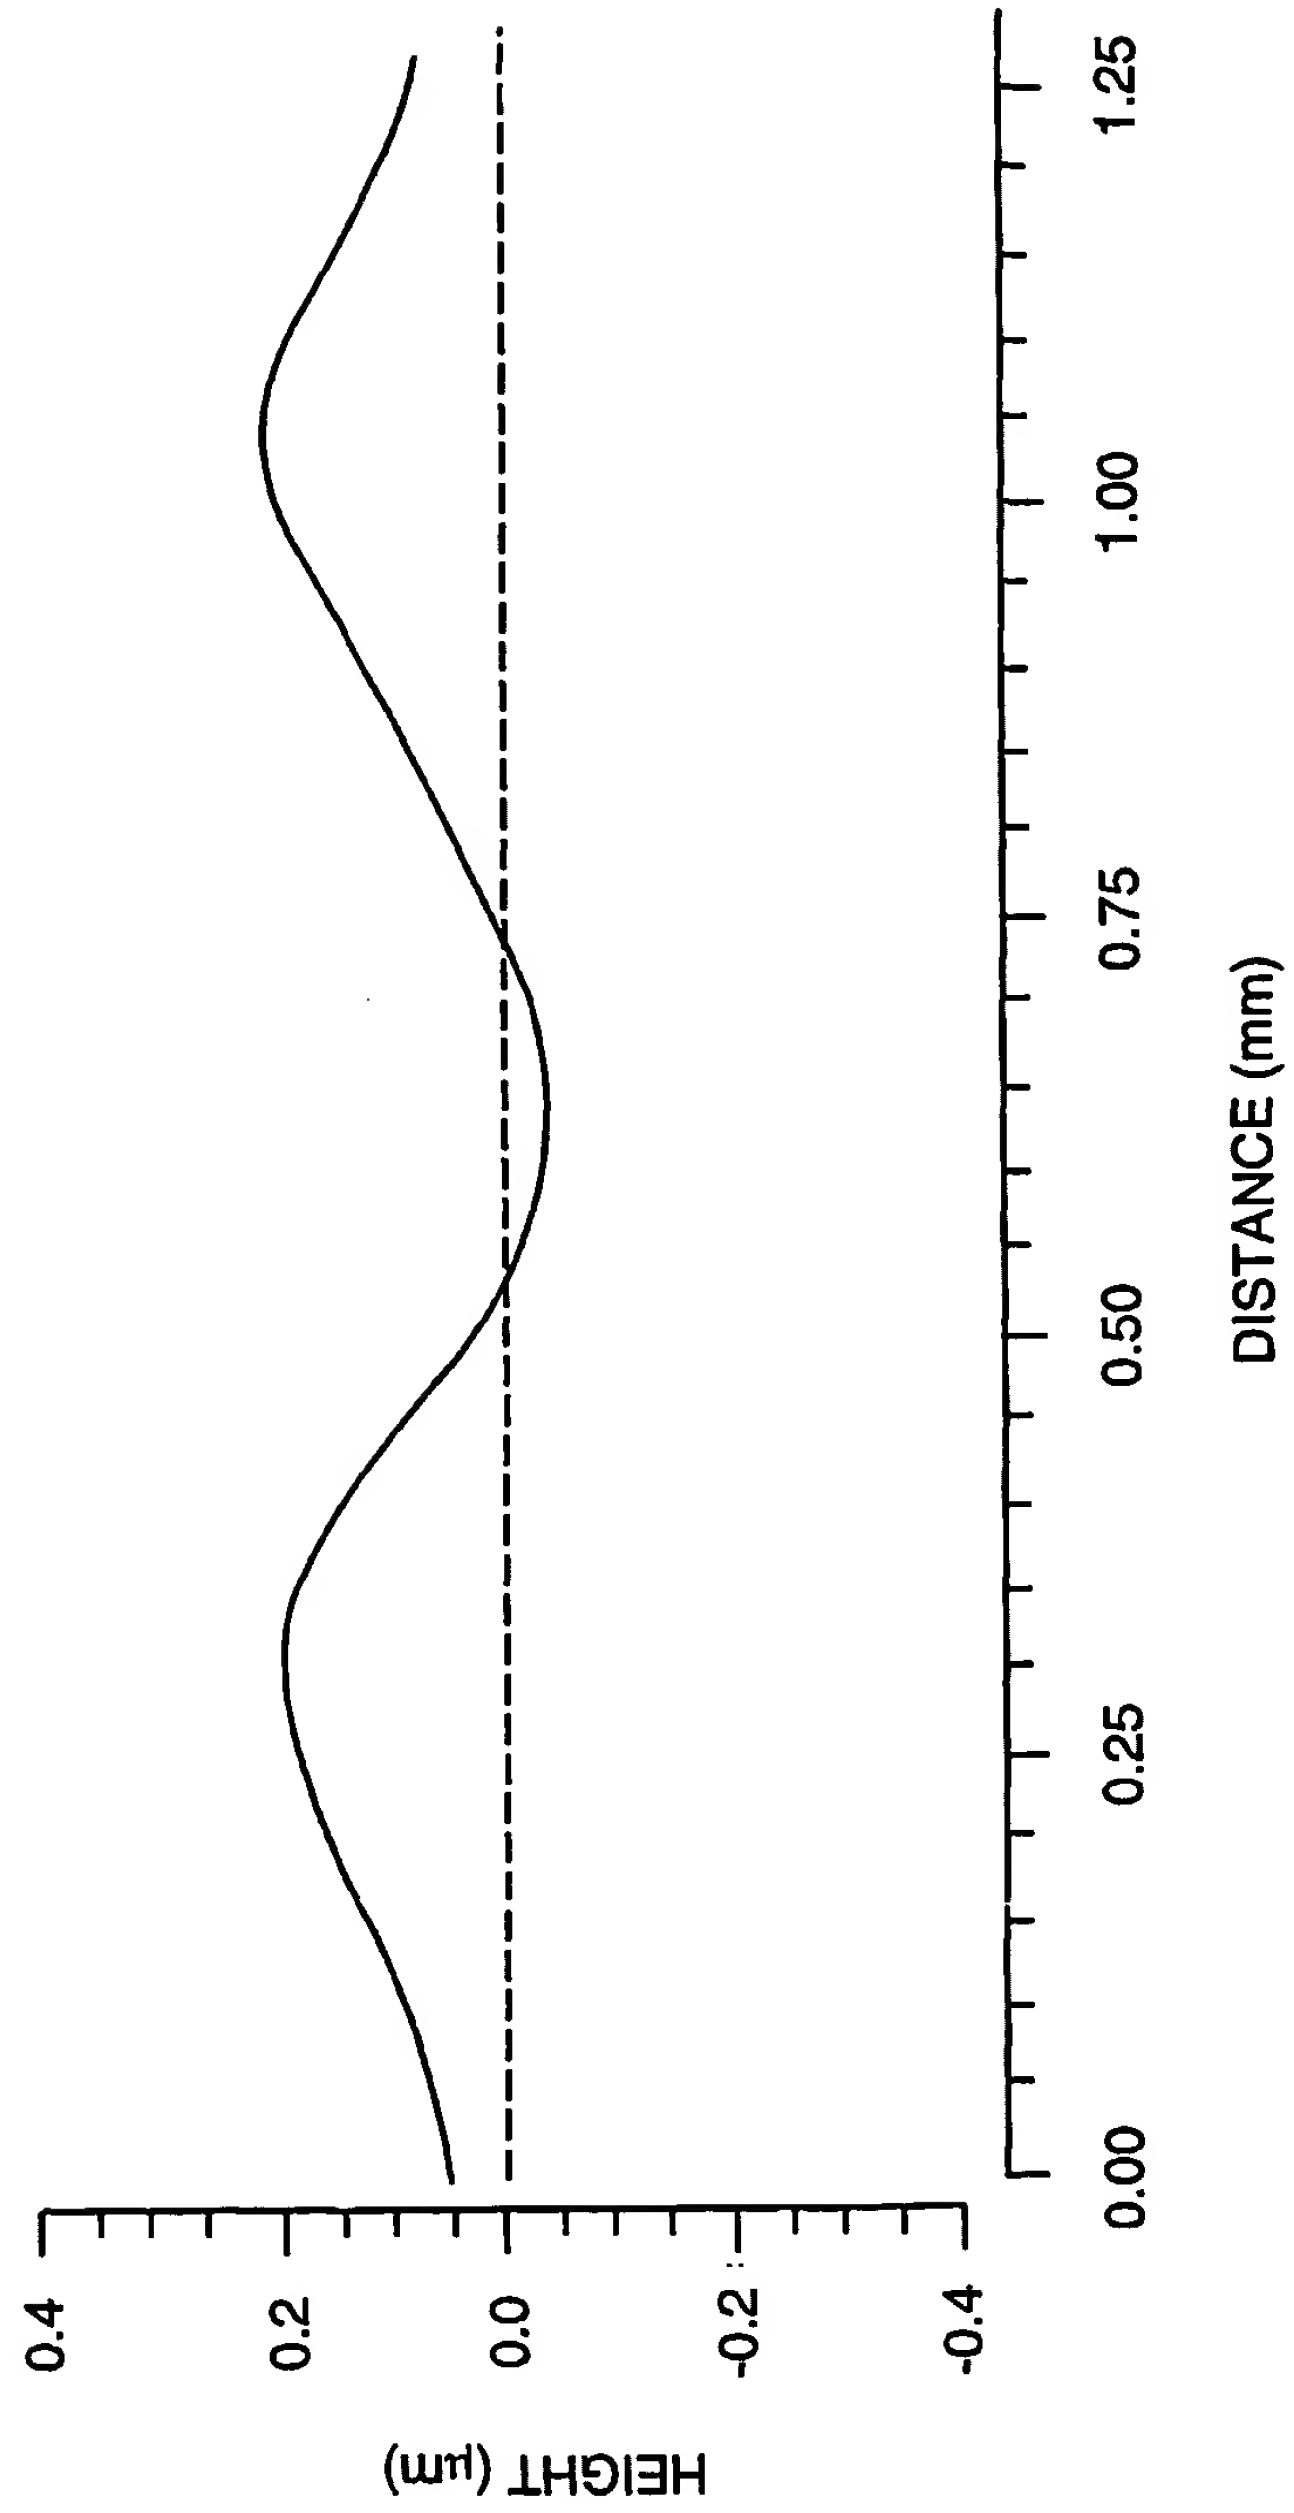


FIG. 10